


Fig. 1 prior art

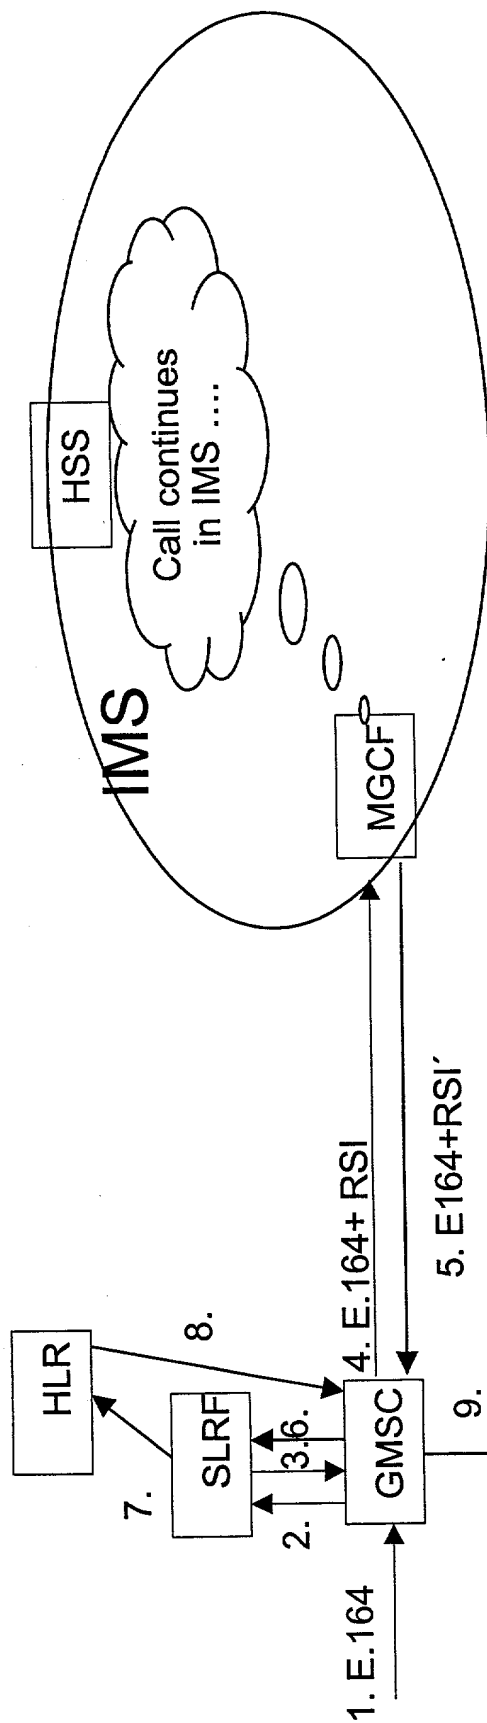


Description:

1. IAM (E164)
2. SRI (E164)
3. SRI_ack (E164+RSI)MS-B
4. IAM (E164+RSI)
5. IAM (E164+RSI')
6. SRI (E164+RSI')
7. SRI (E164)
- 8.. SRI_ack(MSRN)
9. IAM (MSRN)

Abreviations:

- E.164 number = Mobile Station ISDN number (MSISDN r
- RSI = Routing and Status Information to IMS
- RSI' = Routing and Status Information to CS
- IMS = Internet Multimedia Subsystem

Fig. 2

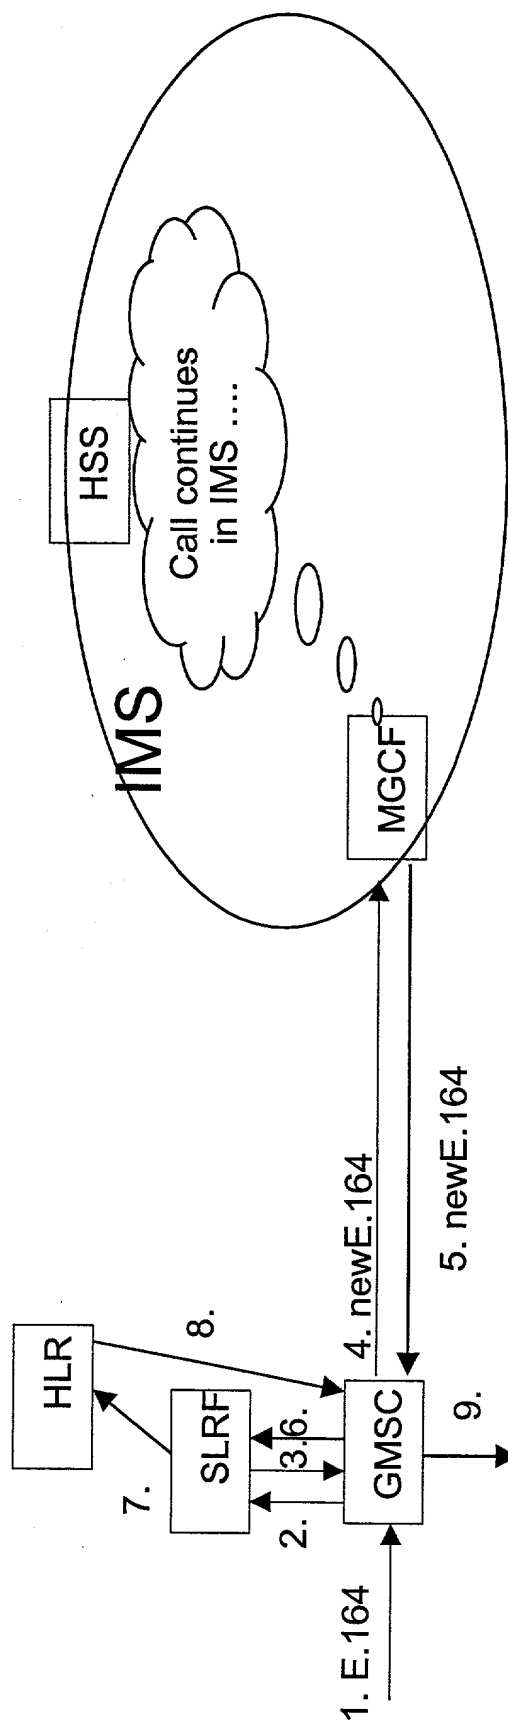

Description:

1. IAM (E164)
2. SRI (E164)
3. SRI_ack (new E164) MS-B
4. IAM (newE164)
5. IAM (newE164)
6. SRI (newE164)
7. SRI (E164)
8. SRI_ack(MSRN)
9. IAM (MSRN)

Abbreviations:

- E.164 number =
 newE.164 =
 IMS =

can be e.g. Mobile Station ISDN number
 (MSISDN number);
 a new E.164 number in IMS;
 Internet Multimedia Subsystem

Fig. 3